

# SAFETRAK CONVEYORS


## Safe and Easy to Assemble and Reconfigure!

3 standard widths (12", 24" or 36") and over 20 standard lengths from 3' to 42' assembled from 2', 4' and 8' sections.


Designed specifically with industrial applications in mind, the SAFETRAK Conveyor delivers efficient unit handling wherever it's needed.

Whether you're looking for a temporary or permanent unit handling system, SAFETRAK Conveyors are the premiere choice for:

- Logistics / Distribution Centers
- Factories
- Warehouses
- Airports

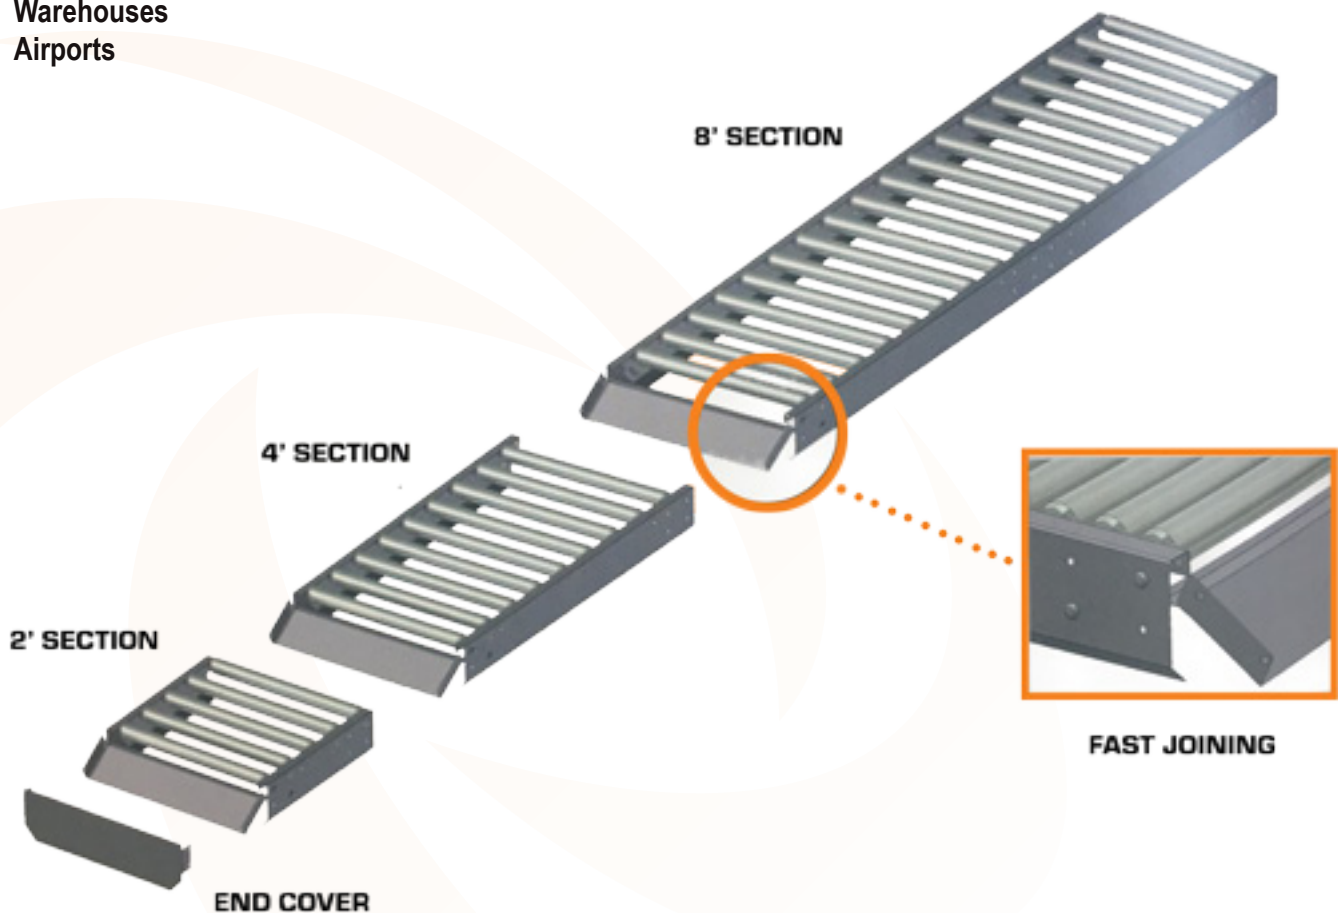

**INTERQUIP**  
CONVEYORS


 (203) 322-2600

 [interquip.us/safetrak](http://interquip.us/safetrak)

 [info@interquip.net](mailto:info@interquip.net)

# SAFETRAK CONVEYORS

SELF ASSEMBLY FLAT ECONOMICAL ROLLER CONVEYORS

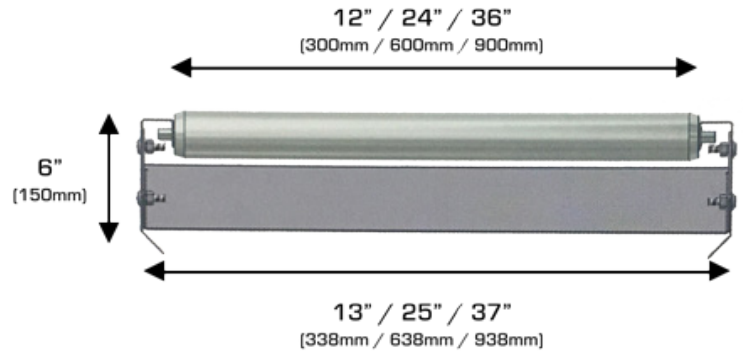


## SPECIFICATIONS

Models	ST300 (12" Rollers), or ST600 (24" Rollers) or ST900 (36" Rollers)			STANDS REQUIRED
Approx. Length	SECTIONS REQUIRED			
	2'	4'	8'	
3'	1			2
5'		1		2
7'	1	1		2
9'			1	2
11'	1		1	2
13'		1	1	3
15'	1	1	1	3
17'			2	3
19'	1		2	3
21'		1	2	4
23'	1	1	2	4
25'			3	4
27'	1		3	4
29'		1	3	5
31'	1	1	3	5
32.5'			4	5
34.5'	1		4	5
36'		1	4	6
38'	1	1	4	6
40'			5	6
42'	1		5	6

## STANDARD STAND HEIGHTS

- Stand 1 : 20" – 27"
- Stand 2 : 27" – 38"
- Stand 3 : 38" – 55"

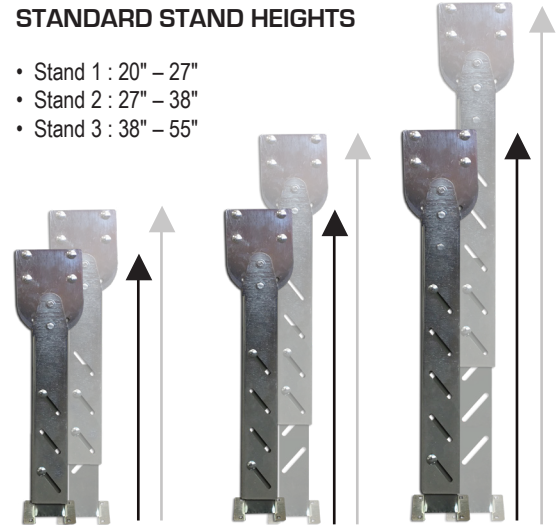

## CASTORS

Optional 4" castors can be added to the stands to increase the mobility of your conveyor. Choice of rigid (straight rolling) or lockable swivel castors will add 5" to the overall conveyor height.



**INTERQUIP**  
CONVEYORS

(203) 322-2600

interquip.us/safetrak

info@interquip.net