


LINKUP CONVEYORS

A Collapsible Conveyor System:

Where Adaptability and Portability Meet Affordability!

- Bi-Directional
- Two Speeds
- 110v/20A Power Supply
- 3-Phase Direct Drive Drum
- 16" wide, 2" High Cleated Belt
- Impact Bed at Loading Zones
- Internal Belt Scraper

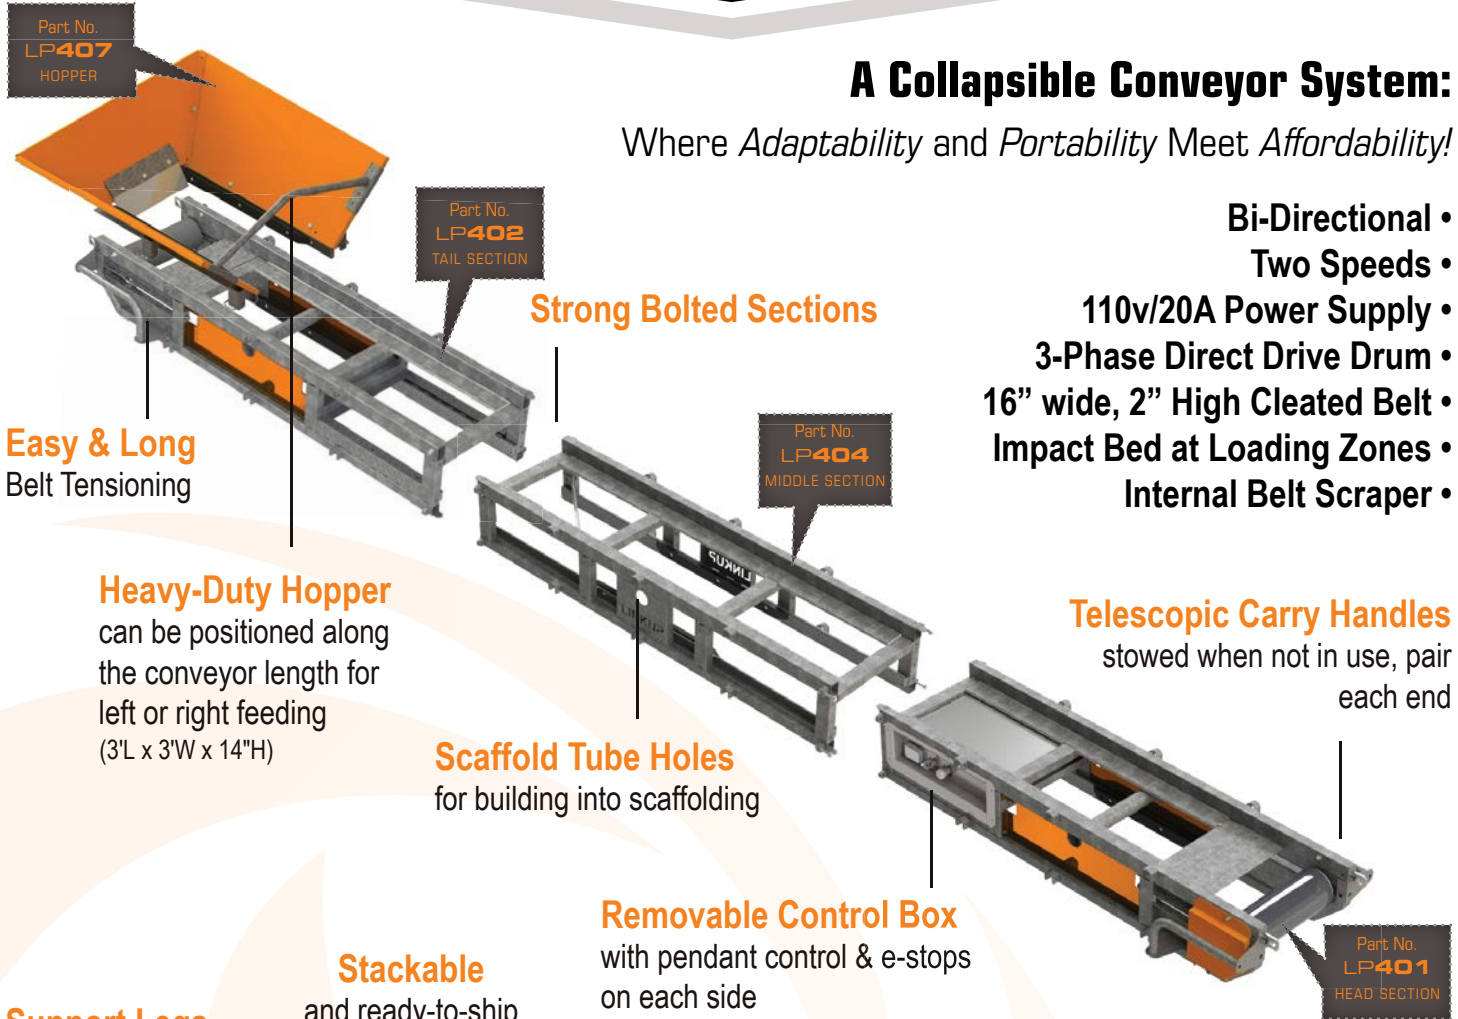

Easy & Long
Belt Tensioning

Heavy-Duty Hopper
can be positioned along
the conveyor length for
left or right feeding
(3'L x 3'W x 14"H)

Strong Bolted Sections

Scaffold Tube Holes
for building into scaffolding

Telescopic Carry Handles
stowed when not in use, pair
each end

Removable Control Box
with pendant control & e-stops
on each side

Stackable
and ready-to-ship

Support Legs
for site support and
shipping stack



LP400-12FT

LP400-18FT

LP400-24FT

LP400-30FT

INTERQUIP CONVEYORS

(203) 322-2600

interquip.us/linkup-conveyors

info@interquip.net

Assembles in less than 30 minutes and neatly “stacks-and-straps” to move on to the next job!



Compact Convenience

The All-New LINKUP LP400 Conveyor is a robust, powerful, and compact dirt conveyor. Powered by a 3-Phase Drum Drive motor with a 110V single-phase power supply, it operates with two speeds in forward or reverse direction. Its 16” wide 2” high cleated rubber belt can move up to 800 lbs of material at a time – *that’s up to and over 60TPH!*



Integrated Features and Benefits

The LP400 has over 35 years of experience built into the design to provide the most efficient way to meet today’s demand for conveying material on site. Four different hopper options support hand-feeding to front-loader operations. Standard support stands are used not just for on-site support but also to strap the conveyor sections together for storage, handling with forklifts, and shipping to and from site.

LINKUP CONVEYORS	LENGTH	WIDTH	HEIGHT (stacked)	WEIGHT	NUMBER OF SECTIONS		
					HEAD [LP401]	MIDDLE [LP404]	TAIL [LP402]
LP400 – 12FT	12'	28"	29"	574 lbs.	1	0	1
LP400 – 18FT	18'	28"	41"	702 lbs.	1	1	1
LP400 – 24FT	24'	28"	53"	830 lbs.	1	2	1
LP400 – 30FT	30'	28"	65"	957 lbs.	1	3	1
Standard Conveyor	Conveyor, Heavy-Duty Oversized Hopper, Adjustable Support Legs (2 sets)						
Optional Add-Ons	Site Wheel Frame, Towing Wheel Frame, Towing Hitch Attachment						
Conveyor Drive	1KW (1.5HP) Direct Drive Drum; 110v 1-phase input / 220v 3-phase output						
Power Requirements	110v - 20A Supply						
AMP Draw	2A Run / 5A Peak						
Belt	16" Wide Endless Rubber 2-Ply Belt with 2" Horizontal Cleats						
Belt Speed	Two Speeds 65 ft/min Slow / 92 ft/min Fast; Standard Forward / Reverse Direction						
Capacity/Payload**	60 Metric TPH / 800 lbs belt capacity						
Max Angle**	40-50 Degrees						

**Actual Capacity and Operating Angle depend on site conditions and material.

Visit our website for information about our
Site Tow Wheel Kits!



INTERQUIP CONVEYORS

[203] 322-2600



interquip.us/linkup-conveyors



info@interquip.net